

TDJ-2400SPL4

Die Cast Grid Antenna

Technical Sheet



Applications

- 2.4GHz Wireless LAN systems
- 2.4GHz UNII/ISM Applications
- Long-Range Directional Applications
- Point to Point/Point to Multi-point Systems
- Wireless Bridges
- Backhaul/Client Antenna


Features

- Superior Performance
- Aluminum Die Cast Grid
- UV Stable Light Gray Powder Coat Finish
- All Weather Operation
- Easy to Assemble

Specifications

Model	TDJ-2400SPL4
Freq. Range-MHz	2400~2483
Bandwidth-MHz	83
Gain-dBi	15
Beamwidth-°	E: 21 H: 16
F/B Ratio-dB	≥20
VSWR	≤1.5
Impedance-Ω	50
Polarization	Vertical or Horizontal
Max. Power-W	100
Connector Type	N Female or Customization
Dimension-m	0.3×0.4
Weight-Kg	1.4
Pole Diameter-mm	φ 40~50

Install Sketch

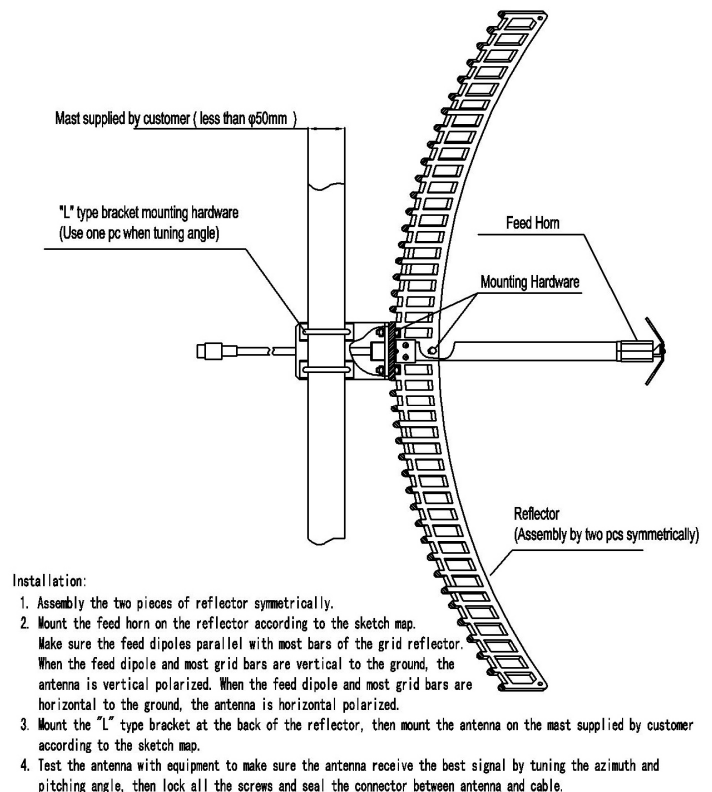

Kenbotong Communication LTD.

Addr: Kenbotong Building, Changrong rd. foshan, Guangdong, China. 528000

Tel: +86-757-82219788, 82126632 Fax: +86-757-82212072

Email: kbt@kenbotong.com web: <http://www.kenbotong.com>