

TQJ-2400BI

2.4GHz Fiberglass Omni Antenna

Technical Sheet



Applications

- 2.4GHz ISM Band
- 2.4GHz Wireless LAN Systems
- WiFi
- Multipoint Applications


Features

- Low VSWR
- Lightweight Fiberglass Radome
- Integral N-Female Connector
- Supplied with Mast Mounting Kit

Specifications

Model	TQJ-2400BI
Freq. Range-MHz	2400~2483
Bandwidth-MHz	83
Gain-dBi	8
Vertical Beamwidth-°	16
VSWR	≤1.5
Impedance-Ω	50
Polarization	Vertical
Max. Power-W	100
Connector Type	N Female
Dimension-mm	515
Weight-Kg	0.25
Pole Diameter-mm	φ 40~50

Install Sketch

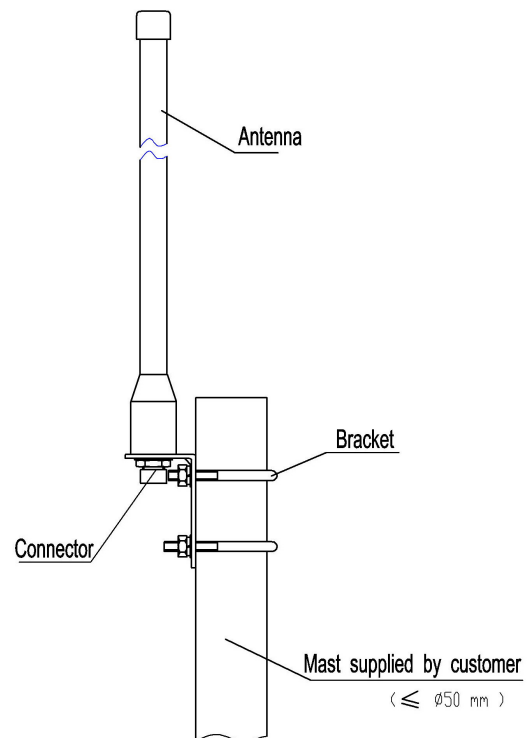

Kenbotong Communication LTD.

Addr: Kenbotong Building, Changrong rd. foshan, Guangdong, China. 528000

Tel: +86-757-82219788, 82126632 Fax: +86-757-82212072
Email: kbt@kenbotong.com web: <http://www.kenbotong.com>